
LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.07V I:0.0686A P:14.578W PF:0.9655 Freq:50.00Hz Lamp Flux:1273.56x1 lm		
NAME: 14W-24	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


DATA OF LAMP		PHOTOMETRIC DATA		Eff: 87.36 lm/W	
MODEL		Imax(cd)	6951	S/MH(C0/180)	0.39
NOMINAL POWER(W)	--	LOR(%)	100.0	S/MH(C90/270)	0.41
RATED VOLTAGE(V)	--	TOTAL FLUX(lm)	1273.6	η UP,DN(C0-180)	0.0,48.4
NOMINAL FLUX(lm)	1273.56	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,51.6
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	--	η down(%)	100.0	CIBSE SHR MAX	0.30

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

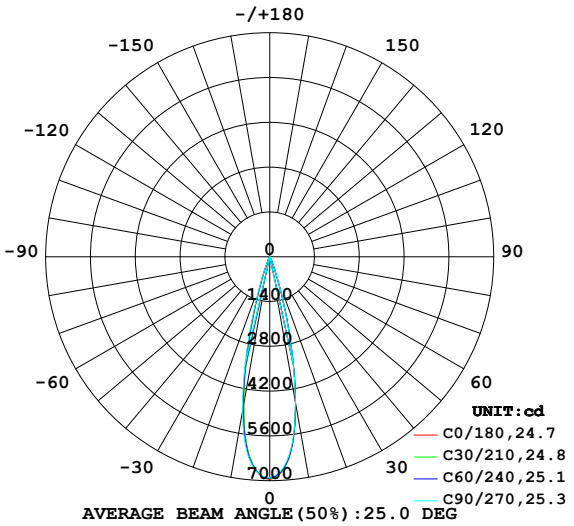

AVERAGE BEAM ANGLE(50%):25.0 DEG

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

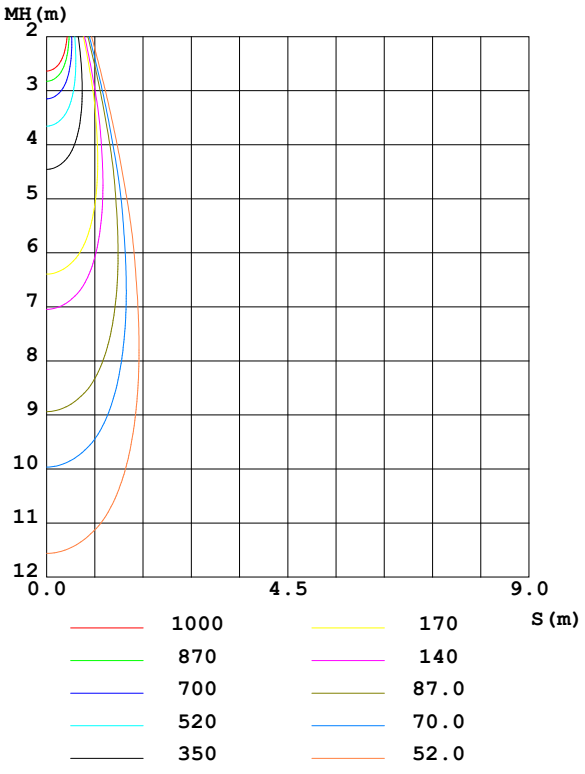

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: 10.0deg/s
Temperature:24.5℃
Operators:xiaoxin
Test Date:2026-09-23

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.463
Humidity:60.0%
Test Distance:9.000m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	4645	4669	4609	4410	4686	4714	4884	4921	0- 10	557.9	557.9	43.8,43.8
20	575.9	637.7	619.6	541.4	612.4	563.4	704.6	701.0	10- 20	606.5	1164	91.4,91.4
30	56.04	57.72	64.96	56.68	61.84	54.06	67.93	62.06	20- 30	93.10	1258	98.7,98.7
40	3.137	3.507	3.462	3.259	3.706	3.566	3.499	3.589	30- 40	14.26	1272	99.9,99.9
50	0.5707	0.6542	0.6995	0.6426	0.6757	0.6251	0.6407	0.6662	40- 50	1.232	1273	100,100
60	0.1856	0.1975	0.2019	0.1911	0.1967	0.1977	0.1975	0.2042	50- 60	0.3106	1273	100,100
70	0.1006	0.1226	0.1271	0.1225	0.1284	0.1277	0.1275	0.1294	60- 70	0.1599	1273	100,100
80	0.0185	0.0281	0.0289	0.0265	0.0345	0.0394	0.0393	0.0410	70- 80	0.0658	1274	100,100
90	0	0	0	0	0.0120	0.0161	0.0128	0.0177	80- 90	0.0185	1274	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1272.6 lm

%lum = 99.9%
%lamp = 99.9%

Conical surface Flux(120deg): 1273.3 lm

%lum = 100.0%
%lamp = 100.0%


C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: 10.0deg/s
Temperature:24.5℃
Operators:xiaoxin
Test Date:2026-09-23

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.463
Humidity:60.0%
Test Distance:9.000m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

LUMINANCE LIMITATION CURVES

GLARE	CLASS	ILLUMINANCE (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300
		a	b	c	d	e	f	g	h

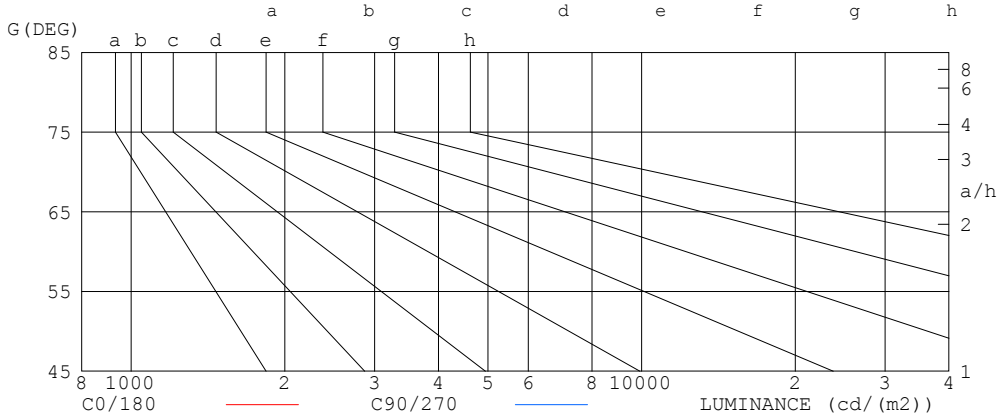


LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	12	34
80	28	44
75	42	53
70	77	98
65	95	104
60	98	106
55	127	157
50	234	286
45	489	543

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: 10.0deg/s
Temperature:24.5℃
Operators:xiaoxin
Test Date:2026-09-23

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.463
Humidity:60.0%
Test Distance:9.000m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.13	1.12	1.10	1.11	1.10	1.08	1.07	1.06	1.05	1.04	1.03	1.02	1.00	.00	.99	.97
2.0	1.09	1.06	1.04	1.07	1.05	1.03	1.04	1.02	1.01	1.01	.00	.98	.99	.98	.96	.95
3.0	1.05	1.02	.99	1.04	1.01	.98	1.01	.99	.97	.99	.97	.95	.97	.95	.94	.93
4.0	1.01	.98	.95	1.00	.97	.95	.99	.96	.94	.97	.95	.93	.95	.93	.92	.91
5.0	.98	.95	.92	.98	.94	.92	.96	.93	.91	.95	.92	.90	.93	.91	.90	.89
6.0	.96	.92	.89	.95	.92	.89	.94	.91	.89	.93	.90	.88	.91	.89	.88	.87
7.0	.93	.90	.87	.93	.89	.87	.92	.89	.86	.91	.88	.86	.90	.87	.86	.85
8.0	.91	.87	.85	.90	.87	.85	.90	.87	.84	.89	.86	.84	.88	.86	.84	.83
9.0	.89	.85	.83	.88	.85	.83	.88	.85	.83	.87	.84	.82	.86	.84	.82	.81
10.0	.87	.83	.81	.87	.83	.81	.86	.83	.81	.85	.83	.81	.85	.82	.80	.80

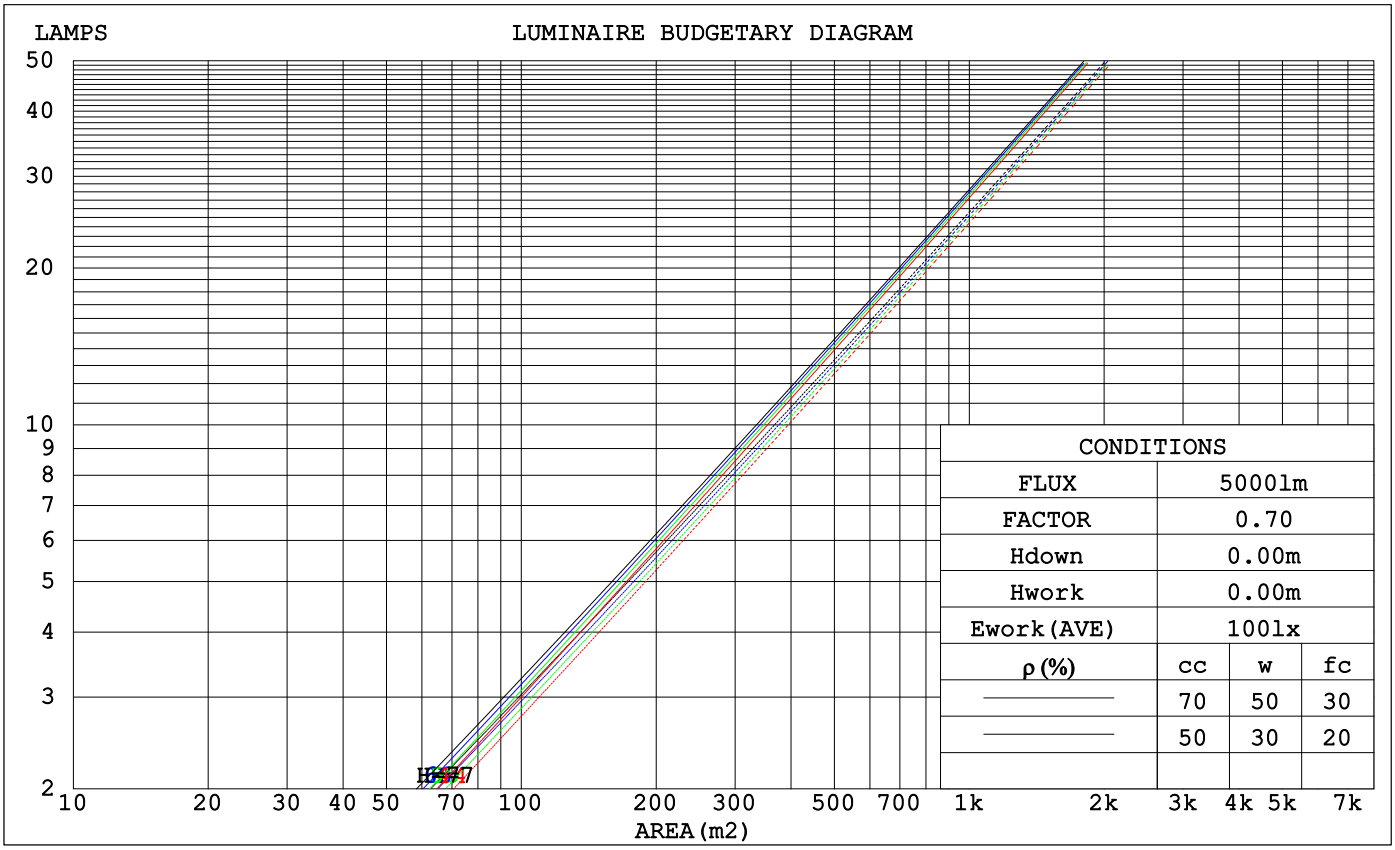

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: 10.0deg/s
Temperature:24.5℃
Operators:xiaoxin
Test Date:2026-09-23

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.463
Humidity:60.0%
Test Distance:9.000m [K=1.0000]
Remarks:

WEC AND CCEC

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coeffcients(WEC)									
0.0																
1.0	.125	.071	.023	.119	.068	.022	.107	.061	.020	.095	.055	.018	.085	.049	.016	
2.0	.115	.063	.019	.110	.060	.019	.099	.055	.017	.090	.051	.016	.081	.046	.015	
3.0	.106	.057	.017	.102	.054	.016	.093	.051	.015	.086	.047	.014	.078	.043	.013	
4.0	.099	.051	.015	.095	.050	.015	.088	.047	.014	.082	.044	.013	.076	.041	.013	
5.0	.093	.047	.014	.089	.046	.013	.084	.043	.013	.078	.041	.012	.073	.039	.012	
6.0	.087	.044	.013	.085	.043	.012	.080	.041	.012	.075	.039	.011	.070	.037	.011	
7.0	.083	.041	.012	.080	.040	.011	.076	.038	.011	.072	.037	.011	.068	.035	.010	
8.0	.079	.038	.011	.077	.038	.011	.073	.036	.010	.069	.035	.010	.066	.034	.010	
9.0	.075	.036	.010	.073	.036	.010	.070	.035	.010	.067	.033	.010	.064	.032	.009	
10.0	.072	.034	.010	.070	.034	.009	.067	.033	.009	.064	.032	.009	.062	.031	.009	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.168	.158	.149	.143	.135	.128	.098	.093	.089	.056	.054	.052	.018	.017	.017	
2.0	.149	.133	.119	.127	.114	.103	.087	.079	.072	.050	.046	.042	.016	.015	.014	
3.0	.133	.113	.097	.114	.098	.085	.078	.068	.059	.045	.040	.035	.015	.013	.011	
4.0	.120	.098	.081	.103	.084	.070	.071	.059	.049	.041	.034	.029	.013	.011	.010	
5.0	.109	.085	.068	.093	.074	.059	.064	.051	.042	.037	.030	.025	.012	.010	.008	
6.0	.099	.075	.057	.085	.065	.050	.059	.045	.035	.034	.027	.021	.011	.009	.007	
7.0	.092	.067	.049	.079	.058	.043	.054	.040	.030	.032	.024	.018	.010	.008	.006	
8.0	.085	.060	.042	.073	.052	.037	.050	.036	.026	.029	.021	.016	.010	.007	.005	
9.0	.079	.054	.037	.068	.047	.032	.047	.033	.023	.027	.019	.014	.009	.006	.005	
10.0	.074	.049	.032	.064	.043	.028	.044	.030	.020	.026	.018	.012	.008	.006	.004	

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: 10.0deg/s
Temperature:24.5℃
Operators:xiaoxin
Test Date:2026-09-23

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.463
Humidity:60.0%
Test Distance:9.000m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

ceiling/cavity		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H	y = 2H	-0.4	0.1	-0.2	0.3	0.4	0.2	0.8	0.4	1.0	1.1
	3H	-0.6	-0.0	-0.3	0.2	0.3	0.1	0.6	0.3	0.8	1.0
	4H	-0.6	-0.1	-0.4	0.1	0.3	0.0	0.5	0.3	0.8	1.0
	6H	-0.7	-0.2	-0.4	0.0	0.2	-0.0	0.4	0.2	0.7	0.9
	8H	-0.8	-0.3	-0.5	-0.0	0.2	-0.1	0.4	0.2	0.6	0.9
	12H	-0.8	-0.3	-0.5	-0.1	0.2	-0.1	0.3	0.2	0.6	0.8
4H	2H	-0.6	-0.1	-0.4	0.1	0.3	0.0	0.5	0.3	0.7	0.9
	3H	-0.8	-0.3	-0.5	-0.1	0.2	-0.1	0.3	0.2	0.6	0.8
	4H	-0.9	-0.5	-0.6	-0.2	0.1	-0.2	0.2	0.1	0.5	0.8
	6H	-1.0	-0.6	-0.6	-0.3	0.0	-0.3	0.0	0.0	0.4	0.7
	8H	-1.0	-0.7	-0.7	-0.4	0.0	-0.4	-0.0	0.0	0.3	0.7
	12H	-1.1	-0.8	-0.7	-0.4	-0.0	-0.4	-0.1	-0.0	0.3	0.6
8H	4H	-1.0	-0.7	-0.7	-0.4	0.0	-0.4	-0.0	0.0	0.3	0.7
	6H	-1.2	-0.9	-0.7	-0.5	-0.1	-0.5	-0.2	-0.1	0.2	0.6
	8H	-1.2	-1.0	-0.8	-0.5	-0.1	-0.6	-0.3	-0.1	0.1	0.6
	12H	-1.3	-1.1	-0.8	-0.6	-0.2	-0.6	-0.4	-0.2	0.0	0.5
12H	4H	-1.1	-0.8	-0.7	-0.4	-0.0	-0.4	-0.1	-0.0	0.2	0.6
	6H	-1.2	-1.0	-0.8	-0.5	-0.1	-0.6	-0.3	-0.1	0.1	0.6
	8H	-1.3	-1.1	-0.8	-0.6	-0.2	-0.6	-0.4	-0.2	0.0	0.5
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H		+ 5.1 / -10.2					+ 5.0 / -10.5				
1.5H		+ 7.6 / - 9.4					+ 7.5 / - 9.4				
2.0H		+ 4.9 / - 3.2					+ 4.9 / - 3.5				

CIE Pub.117, 1274 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 0.8)
Area: 0.0038 m2

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: 10.0deg/s
Temperature:24.5℃
Operators:xiaoxin
Test Date:2026-09-23

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.463
Humidity:60.0%
Test Distance:9.000m [K=1.0000]
Remarks:


UTILIZATION FACTORS TABLE

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	92	86	83	91	86	82	90	85	82	79
0.80	98	93	90	98	93	90	97	92	90	86
1.00	102	97	94	101	97	94	100	96	93	90
1.25	105	101	98	105	100	98	103	99	97	93
1.50	108	104	101	107	103	100	105	102	99	95
2.00	110	106	103	109	105	103	106	103	101	96
2.50	111	108	105	110	107	105	107	104	103	97
3.00	113	110	107	111	108	106	108	106	104	98
4.00	115	112	110	113	111	109	109	107	106	99
5.00	116	114	112	114	112	111	110	109	108	100
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004				Suspended					SHRNOM = 1.25	

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: 10.0deg/s
Temperature:24.5℃
Operators:xiaoxin
Test Date:2026-09-23

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.463
Humidity:60.0%
Test Distance:9.000m [K=1.0000]
Remarks:


ISOCANDELA DIAGRAM

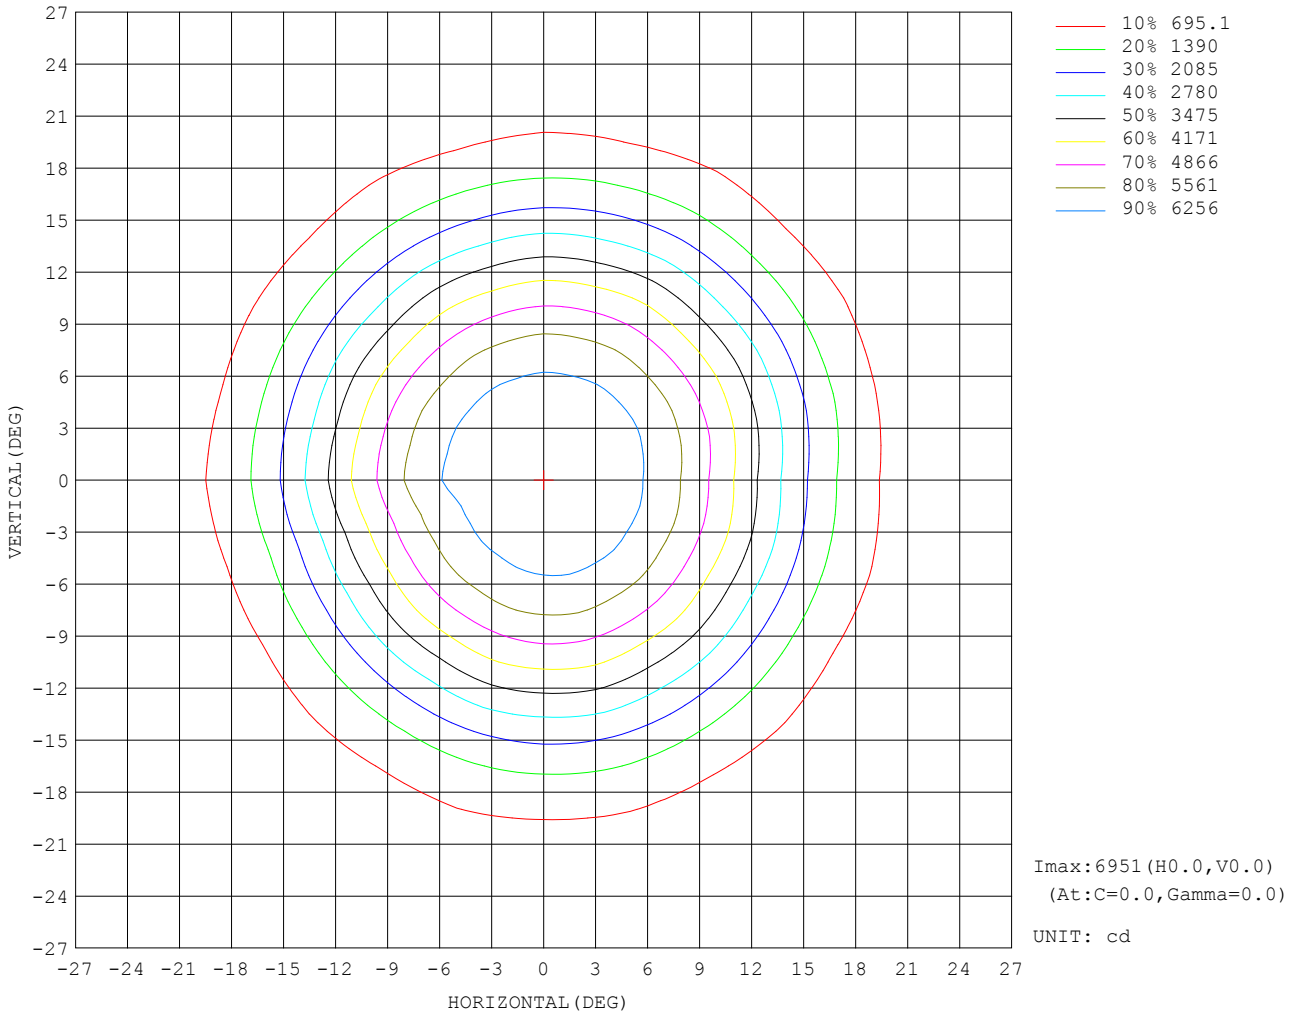

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: 10.0deg/s
Temperature:24.5℃
Operators:xiaoxin
Test Date:2026-09-23

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.463
Humidity:60.0%
Test Distance:9.000m [K=1.0000]
Remarks:

AAI Figure

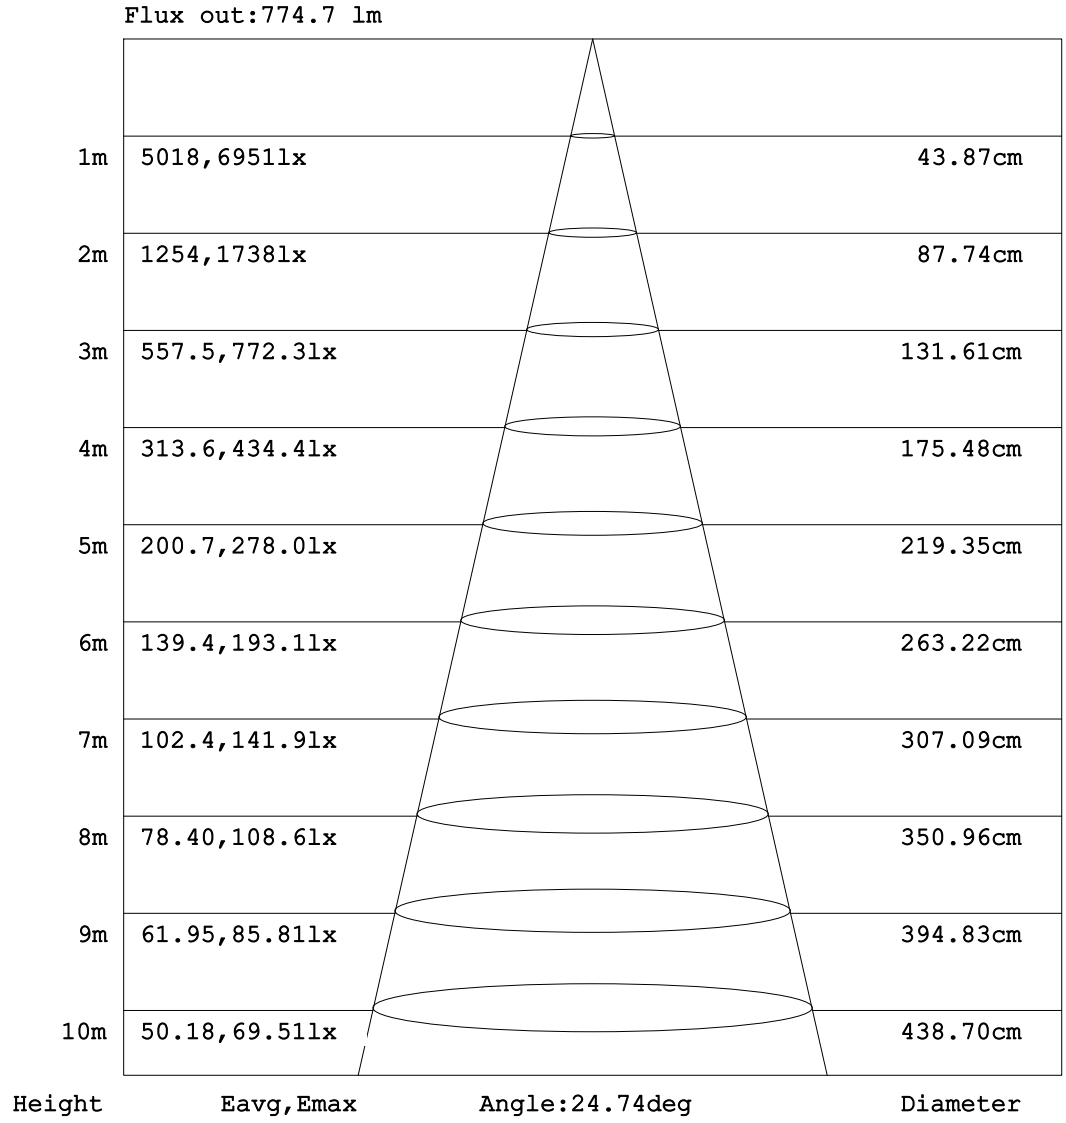


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: 10.0deg/s
Temperature:24.5℃
Operators:xiaoxin
Test Date:2026-09-23

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.463
Humidity:60.0%
Test Distance:9.000m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

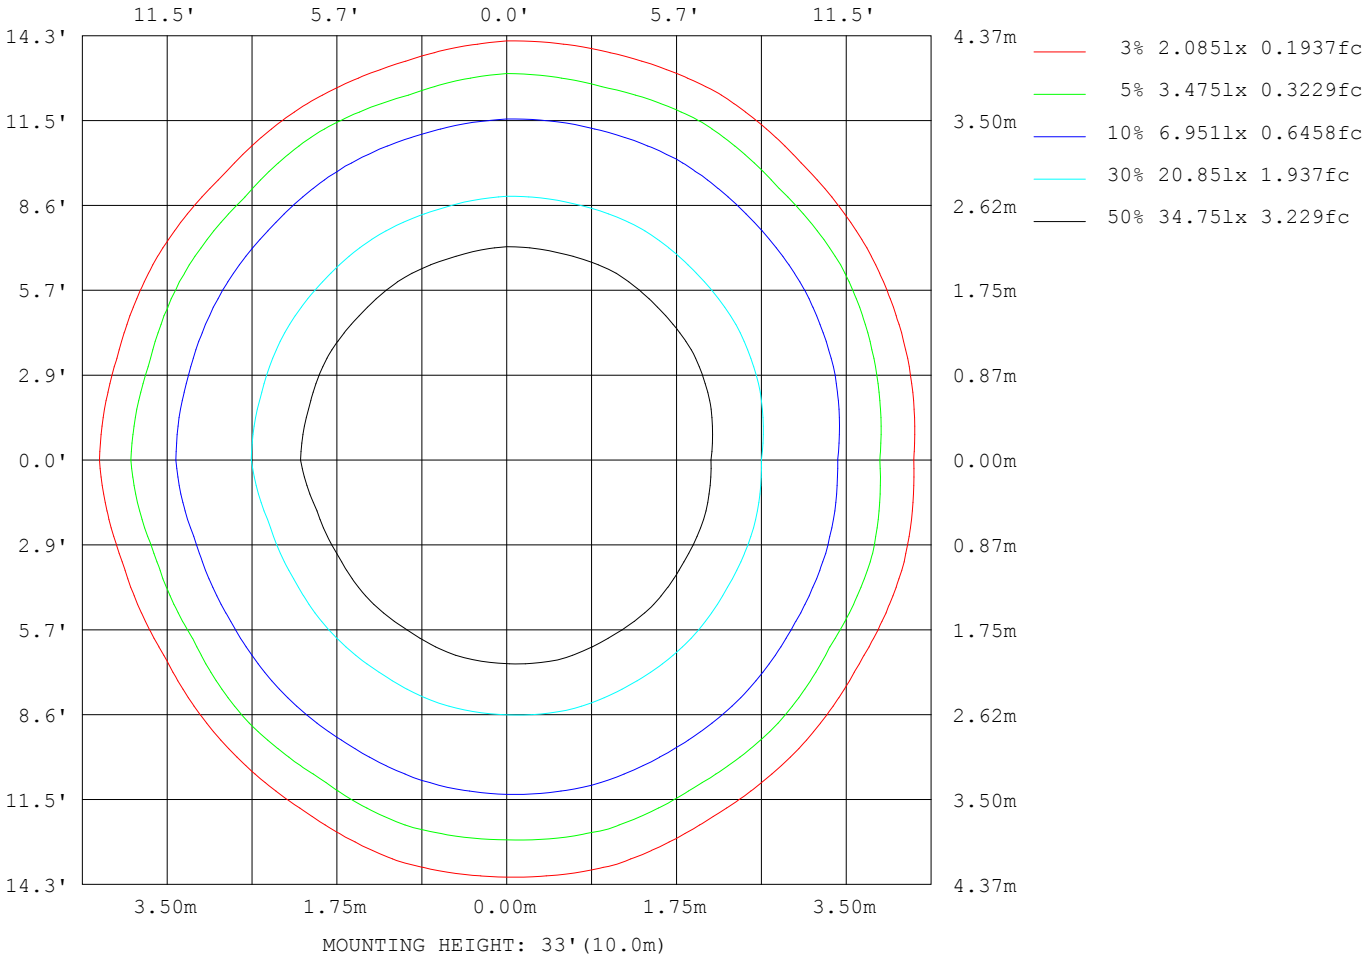

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: 10.0deg/s
Temperature:24.5℃
Operators:xiaoxin
Test Date:2026-09-23

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.463
Humidity:60.0%
Test Distance:9.000m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:220.07V I:0.0686A P:14.578W PF:0.9655 Freq:50.00Hz Lamp Flux:1273.56x1 lm		
NAME: 14W-24	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	99
L_0~180(75)av	49
L_0~180(85)av	34
L_90~270(65)av	104
L_90~270(75)av	57
L_90~270(85)av	50
L_45(65)av	102
L_45(75)av	55
L_45(85)av	52

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: 10.0deg/s
Temperature:24.5℃
Operators:xiaoxin
Test Date:2026-09-23

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.463
Humidity:60.0%
Test Distance:9.000m [K=1.0000]
Remarks:

Planar Illuminance Curve

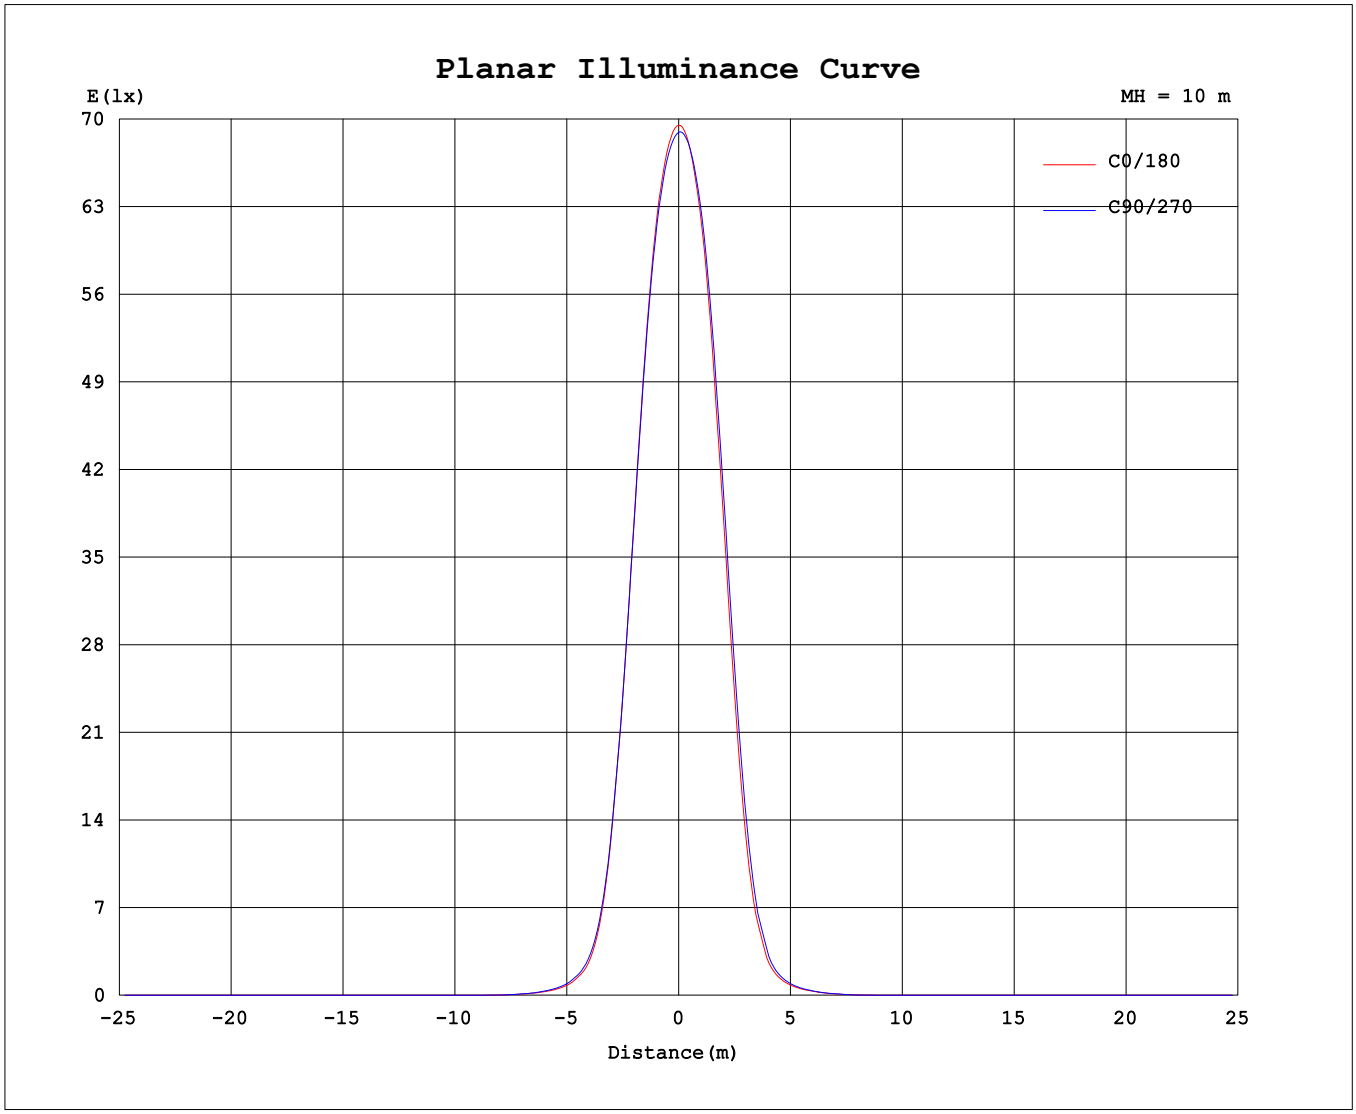

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: 10.0deg/s
Temperature:24.5℃
Operators:xiaoxin
Test Date:2026-09-23

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.463
Humidity:60.0%
Test Distance:9.000m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Table--1 UNIT: cd

γ (DEG) \ C(DEG)	0	15	30	45	60	75	90	105	120	135	150	165	180	195	210	225	240	255	270
0	6951	6942	6930	6923	6913	6904	6895	6882	6874	6871	6865	6862	6951	6942	6930	6923	6913	6904	6895
5	6429	6434	6410	6423	6400	6400	6363	6326	6274	6263	6237	6259	6449	6431	6449	6450	6481	6482	6508
10	4645	4672	4639	4669	4649	4669	4609	4540	4419	4410	4334	4418	4686	4674	4699	4714	4769	4815	4884
15	2177	2194	2176	2209	2215	2237	2182	2107	2005	1928	1909	1923	2175	2156	2195	2211	2275	2291	2407
20	576	627	574	638	607	656	620	628	531	541	471	510	612	551	595	563	648	628	705
25	160	162	159	162	173	183	186	178	162	147	134	141	158	153	148	143	156	167	183
30	56.0	59.0	54.5	57.7	58.3	65.8	65.0	65.5	58.6	56.7	51.9	55.6	61.8	57.2	57.8	54.1	59.5	60.9	67.9
35	19.3	19.3	19.1	19.1	20.2	20.9	21.5	20.4	19.6	18.2	18.2	18.4	21.3	21.4	20.3	20.3	20.6	21.6	22.7
40	3.14	3.26	3.40	3.51	3.76	3.73	3.46	3.29	3.26	3.26	3.35	3.39	3.71	3.58	3.54	3.57	3.60	3.58	3.50
45	1.31	1.35	1.38	1.43	1.46	1.48	1.46	1.42	1.40	1.36	1.34	1.32	1.37	1.35	1.34	1.36	1.37	1.38	1.37
50	0.57	0.58	0.61	0.65	0.69	0.71	0.70	0.66	0.67	0.64	0.63	0.61	0.68	0.66	0.65	0.63	0.63	0.63	0.64
55	0.28	0.28	0.30	0.31	0.33	0.34	0.34	0.33	0.33	0.31	0.29	0.28	0.31	0.31	0.31	0.31	0.31	0.31	0.32
60	0.19	0.19	0.19	0.20	0.20	0.20	0.20	0.20	0.20	0.19	0.19	0.18	0.20	0.20	0.20	0.20	0.20	0.20	0.20
65	0.15	0.16	0.16	0.16	0.16	0.16	0.17	0.16	0.16	0.16	0.16	0.15	0.17	0.17	0.16	0.17	0.17	0.17	0.17
70	0.10	0.11	0.11	0.12	0.13	0.13	0.13	0.13	0.13	0.12	0.12	0.11	0.13	0.13	0.13	0.13	0.13	0.13	0.13
75	0.04	0.04	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.04	0.06	0.06	0.06	0.06	0.06	0.06	0.06
80	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.03	0.04	0.04	0.04	0.04	0.04	0.04
85	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.01	0.01	0.01	0.00	0.02	0.02	0.02	0.02	0.02	0.02	0.02
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.02	0.02	0.02	0.01	0.01

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: 10.0deg/s
Temperature:24.5℃
Operators:xiaoxin
Test Date:2026-09-23

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.463
Humidity:60.0%
Test Distance:9.000m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Table--2 UNIT: cd

γ (DEG) \ C(DEG)	285	300	315	330	345														
0	6882	6874	6871	6865	6862														
5	6509	6532	6515	6506	6453														
10	4908	4950	4921	4899	4824														
15	2427	2520	2466	2478	2364														
20	698	754	701	723	655														
25	190	192	182	176	176														
30	67.4	69.0	62.1	63.1	59.8														
35	23.5	23.2	22.0	21.1	21.1														
40	3.54	3.61	3.59	3.46	3.31														
45	1.40	1.41	1.44	1.40	1.36														
50	0.65	0.66	0.67	0.65	0.60														
55	0.33	0.32	0.32	0.31	0.30														
60	0.20	0.20	0.20	0.20	0.20														
65	0.17	0.17	0.17	0.17	0.17														
70	0.13	0.13	0.13	0.13	0.13														
75	0.06	0.06	0.06	0.06	0.06														
80	0.04	0.04	0.04	0.04	0.04														
85	0.02	0.02	0.03	0.03	0.02														
90	0.01	0.02	0.02	0.02	0.02														

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: 10.0deg/s
Temperature:24.5℃
Operators:xiaoxin
Test Date:2026-09-23

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.463
Humidity:60.0%
Test Distance:9.000m [K=1.0000]
Remarks: